

Model RRH-C1R Series Cook & Hold/ Retherm Oven (With Radiant Hold)




Performance Features

- Two separate processes: *Gentle Convection Cook* and *Radiant Heat Hold* produces truly **Tender Roast™** products with the highest quality and greatest yields
- **Whisper Touch™** *Gentle Convection Cook* produces natural browning of products – meats, poultry, fish, casseroles, potatoes, vegetables, baked goods and desserts
- **Gentle Touch™** *Radiant Heat Hold* produces unsurpassed holding times
- Retherms frozen entrees, precooked products, and finger foods to perfection
- Greatly reduces shrinkage
- Induces optimum enzyme action to naturally tenderize or “age” meats
- Greatly reduces labor and utility costs
- Cook with timer or standard meat probe
- Cook temperature range: 150F – 350F
- Holding temperature range: 100F – 200F

Construction Features

- Self-contained power module for ease of service
- Fully insulated construction 1½” of insulation
- Type 304, 20 gauge welded stainless steel body and doors
- 12 gauge internal frame for strength
- Field reversible doors
- Latch is magnetic/mechanical style
- Long lasting, high temperature silicone door gasket
- Four heavy duty, 5” swivel casters, two with brakes
- Lift out oven interior for easy cleaning
- Radiant heat source in side walls for superior holding and serviceability
- One piece .160 aluminum base



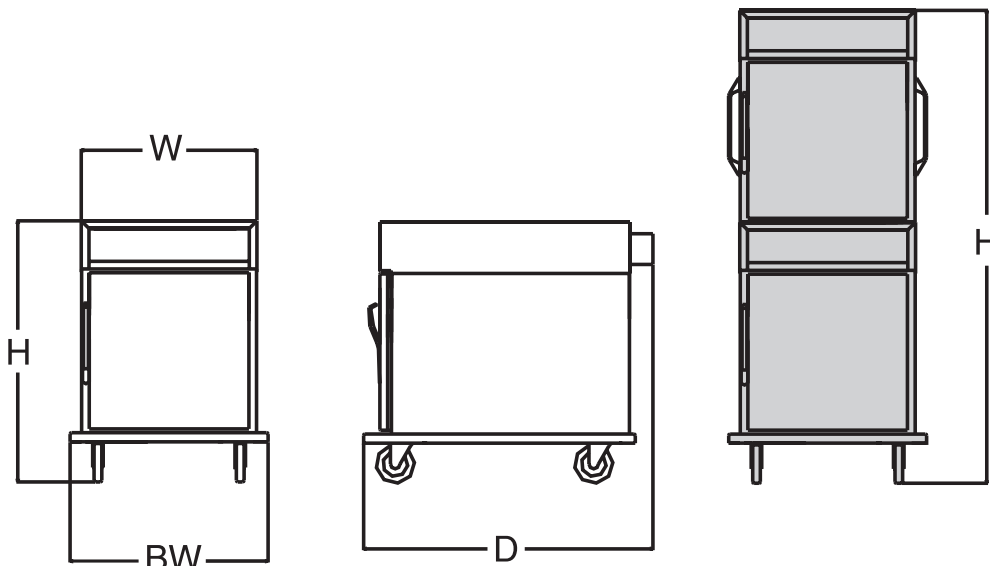

Model Number	Pan Capacity Per Oven Pan Spacing Per Oven C1R - 3 3/8" Fixed C1USR - 1 1/2" Adjustable						Height (H)	Depth (D)	Width (W)	Base Width (BW)	Shipping Wt. (lbs)	Volts	Total Watts Per Oven Compartment	Total Amps Per Oven Compartment	Hertz/Phase	Power Cord Plug (NEMA)
	18x26x1 Sheet		12x20x2½ Pan		13x26x2⅝ Basket											
	STD *	MAX	STD *	MAX	STD	MAX										
RRH-4135-C1R	5	5					34	37½	22¾	25¾	280	208 to 240	5100	24.5	50/60 1Ø	6-30P 
RRH-4135-C1RX •	10	10					61⅝				560					
RRH-4135-C1USR	4	10+	8	10+			34		26	29	325					
RRH-4135-C1USRX •	8	20+	16	20+			61⅝				650					

X Denotes stacked unit. + Requires additional pan slides
• Two electrical circuits required

Bidding Specifications

Royalton Model # RRH-____-C1__R, gentle convection cook and radiant heat hold oven, fully insulated, all stainless steel construction and in-wall radiant heating with solid-state controls incorporated in the self-contained power module. Digital readout for timer and cooking probe. Counts down cook time and counts up hold time. Cooking probe standard.

Options

- Correctional Package
- Casters – Specials and Sizes
- Pass-Through Doors
- Tempered Glass Doors Full View
- Transport Latch
- Side Lift Handles
- Legs
- Wire Shelf Interior
- Perimeter Bumper
- Raised Wire Grid for 18x26 pan
- Stacking Kit
- Cold Pack
- Latch Magnetic/Mechanical w/Key Lock

Optional Power Modules

- 6100 Watt Top = RRH-6135-C1R
6100 Watt Top = RRH-6135-C1USR
208-240V, 50/60Hz, 1Ø, 29.6A
NEMA 6-50P 
- 8100 Watt Top = RRH-8135-C1R
8100 Watt Top = RRH-8135-C1USR
208-240V, 50/60Hz, 1Ø, 39.6A
NEMA 6-50P 

* RRH-C1R body furnished with fixed pan slides to hold (5) 18x26 pans max.

* RRH-C1USR body furnished with 4 sets of universal pan slides, optional up to 10 sets.

NOTE: Double quantities for stacked units.