

Model RRH-C1 Series

Cook & Hold/ Retherm Oven

(With Gentle Convection Hold)




Performance Features

- **Whisper Touch™ Gentle Convection** rethermalizing and holding cycles for fast, safe heating and holding of value added products
- **Whisper Touch™ Gentle Convection** retherm assures maximum moisture retention resulting in better taste and longer hold times
- **Whisper Touch™ Gentle Convection Cook** produces natural browning of products – meats, poultry, fish, casseroles, potatoes, vegetables, baked goods and desserts
- **Whisper Touch™ Gentle Convection Hold** maintains proper holding temperatures no matter the frequency of “in & out” to retrieve product
- Ideally suited for school foodservice, catering, and banquet applications
- Greatly reduces labor and utility costs
- Cook with timer or standard meat probe
- Cook temperature range: 150F – 350F
- Holding temperature range: 100F – 200F

Construction Features

- Self-contained power module for ease of service
- Fully insulated construction 1½” of insulation
- Type 304, 20 gauge welded stainless steel body and doors
- 12 gauge internal frame for strength
- Field reversible doors
- Latch is magnetic/mechanical style
- Long lasting, high temperature silicone door gasket
- Four heavy duty, 5” swivel casters, two with brakes
- Lift out oven interior for easy cleaning
- One piece .160 aluminum base



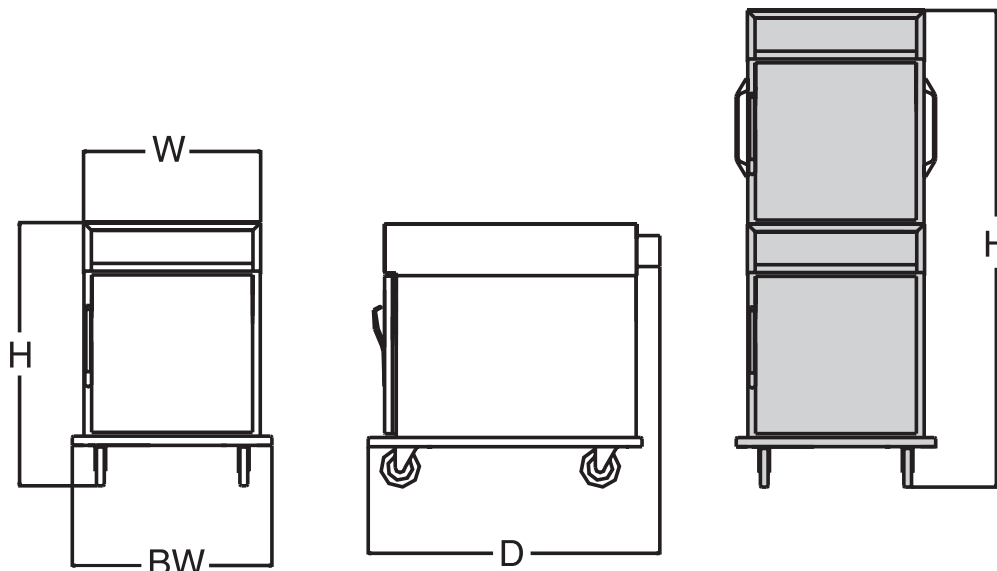

Model Number	Pan Capacity Per Oven Pan Spacing Per Oven C1 - 3 3/8" Fixed C1US - 1 1/2" Adjustable C1W - 3 1/2" Fixed						Height (H)	Depth (D)	Width (W)	Base Width (BW)	Shipping Wt. (lbs)	Volts	Total Watts Per Oven Compartment	Total Amps Per Oven Compartment	Hertz/Phase	Power Cord Plug (NEMA)
	18x26x1 Sheet		12x20x2 1/2 Pan		13x26x2 5/8 Basket											
	STD *	MAX	STD *	MAX	STD *	MAX										
RRH-4135-C1	5	5					34	37 1/2	22 3/4	25 3/4	246	208 to 240	4100	17.8	50/60 1Ø	
RRH-4135-C1X •	10	10					61 5/8				492					
RRH-4135-C1US	4	11+	8	12+			34				282					
RRH-4135-C1USX •	8	22+	16	24+			61 5/8		564							
RRH-4135-C1W	5	5			10	10	34		267							
RRH-4135-C1WX •	10	10			20	20	61 5/8		534							

X Denotes stacked unit. + Requires additional pan slides
• Two electrical circuits required

Bidding Specifications

Royalton Model # RRH-___-C1___, gentle convection cook and gentle convection heat hold oven, fully insulated, all stainless steel construction with solid-state controls incorporated in the self-contained power module. Digital readout for timer and cooking probe. Counts down cook time and counts up hold time. Cooking probe standard.

Options

- Correctional Package
- Casters – Specials and Sizes
- Pass-Through Doors
- Tempered Glass Doors Full View
- Transport Latch
- Side Lift Handles
- Legs
- Wire Shelf Interior
- Perimeter Bumper
- Raised Wire Grid for 18x26 pan
- Stacking Kit
- Cold Pack
- Latch Magnetic/Mechanical w/Key Lock

Optional Power Modules

- 6100 Watt Top = RRH-6135-C1
6100 Watt Top = RRH-6135-C1US
6100 Watt Top = RRH-6135-C1W
208-240V, 50/60Hz, 1Ø, 25.4A 
NEMA 6-50P
- 8100 Watt Top = RRH-8135-C1
8100 Watt Top = RRH-8135-C1US
8100 Watt Top = RRH-8135-C1W
208-240V, 50/60Hz, 1Ø, 39.6A 
NEMA 6-50P

* RRH-C1 body furnished with fixed pan slides to hold (5) 18x26 pans max.

* RRH-C1US body furnished with 4 sets of adjustable universal pan slides, optional up to 11 sets.

* RRH-C1W body furnished with fixed pan slides to hold (5) 18x26 pans or (10) 13x26x2 5/8 baskets, max.

NOTE: Double quantities for stacked units.